



Torque tester SENSOTORK®

7707 W

Art.No. 96521072

GTIN 4018754155781

Model 7707-2W

Label.

Torque tester SENSOTORK No.7707-2W ²⁾ N·m

Description.

Electronic torque tester for torque wrenches, consisting of:


- transducer (patent)
- holder
- display unit (registered design)
- tripod for display unit (with 1.5 m cable)
- spiral cable
- mains adaptor (110 V–230 V with interchangeable socket adaptors) or direct connection to 12 V in-car supply is possible
- square drive adaptor (No 7707-2W, No 7707-2-1W, No 7707-2-2W, No 7707-3W)
- kit for attaching the unit to a workbench or wall in a horizontal or vertical testing position
- for clockwise and anticlockwise use
- units of measurement: N·m, ft·lb, in·lb
- the easily interchangeable transducers are attached to the holder by means of a QuickRelease safety lock
- low lateral forces thanks to low-profile transducers
- automatic detection of the transducer
- flexible and user friendly because the unit can be used horizontally or vertically and the display unit can be placed in many positions
- additional tripod with 1.5 m cable for mounting the display unit to facilitate visual monitoring when using longer torque wrenches
- especially broad measuring range from approx. 2 % to 100 % of rated value
- the software No 7759-4, including USB hub and jack cable <!-- (see p. [171259]) -->, enables readings to be transferred to the PC for documenting (no separate power supply needed, power comes from PC)
- while individual transducers are being recalibrated, the torque tester itself remains on-site for further use
- wide range of application (-20°C to +60°C)
- complies with DIN 51309, Class 2 and DKD-R 10-8
- with certificate
- supplied in sturdy plastic box

QuickRelease Rapid change and firm locking of the transducers thanks to the QuickRelease safety lock.

Interchangeable square drive adapters: A set of interchangeable square drive adapters are conveniently stored in the mounting block for a range of different drive sizes.



Technical Drawing.

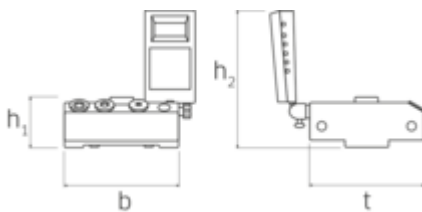

Technical Attributes.

Breite mm (b)	180 mm
Weight with box	10300 g
Height mm (h)	170 mm
Height mm (h1)	79 mm
Height mm (h2)	215 mm
Female square drive [inches]	3/8 "
No.	7707-2W ²⁾
t	180 mm

Logistics data.

Length (IFS)	430
Width (IFS)	340
Height (IFS)	170
Length (packed, mm)	430
Width (packed, mm)	340
Höhe (verpackt, mm)	170
Code	96521072
Weight	7025 g
Weight (gross, kg)	10,080
Weight PAP (kg)	0,016
Weight PVC (kg)	0,000
GTIN	4018754155781
Numbers of content units per order units	1
Country of origin	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	90318080

Parts list.



52100050
Display unit



11030010
Adaptor



52110052
Spiral cable



52110056
Mains adaptor



52110051
Jack cable



91100326
Packaging material



52100059
Transducer in case



52100058
Transducer in case

Varianten.

Code	Article number (ERP)	Article description (Autom.)	GTIN
96521086	7707-1-3W	Torque tester SENSOTORK No.7707-1-3W ¹⁾ N·m	4018754241958
96521085	7707-1-2W	Torque tester SENSOTORK No.7707-1-2W N·m	4018754241941
96521080	7707N-1W	Torque tester SENSOTORK No.7707-1W N·m	4018754181148
96521072	7707-2W	Torque tester SENSOTORK No.7707-2W ²⁾ N·m	4018754155781
96521083	7707-2-1W	Torque tester SENSOTORK No.7707-2-1W ³⁾ N·m	4018754181162
96521084	7707-2-2W	Torque tester SENSOTORK No.7707-2-2W ⁴⁾ N·m	4018754181179
96521082	7707N-3W	Torque tester SENSOTORK No.7707-3W ⁴⁾ N·m	4018754181155

GTIN-Code.





STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.de · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal